

# ALPHA® WS-809

## WATER SOLUBLE SOLDER PASTE

### DESCRIPTION

ALPHA WS-809 is a SnPb, water-soluble solder paste which is designed for a broad range of SMT processes where aqueous post reflow cleaning is required.

### FEATURES & BENEFITS

- Excellent volume transfer efficiency over broad range of environmental conditions
- Fine-pitch printing with consistent shape and volume to 16 mil pitch QFP (63x10x5 mil deposits) and 15 mil circles (BGA225)
- High throughput and yield with consistent print volumes at print speeds ranging from 1 – 6 inches/second
- Exhibits resistance to slumping and drying at temperature up to 66 – 84 °F (19- 29 °C) and relative humidity extremes (35%-65% RH)
- Water cleanable after two paste reflow cycles
- Excellent low voiding performance that exceeds IPC Class III requirement
- Superior solder spread performance on Cu OSP

### PRODUCT INFORMATION

<u>Alloys:</u>	63Sn/37Pb, 62Sn/36Pb/2Ag, NT4S
<u>Powder Size:</u>	89.8% Metal, Type 3 (25-45 µm) / Type 4 (20-38 µm) per IPC J-STD-005
<u>Packaging Sizes:</u>	500 gram jars, 6" and 12" cartridges
<u>Flux Gel:</u>	Available in 10cc and 30cc syringes for rework applications

### PRINT CAPABILITY

ALPHA WS-809 is formulated for both standard and fine feature pitch stencil printing, at print speeds between 1"/sec (25 mm/sec) and 6"/sec (150 mm/sec) with stencil thicknesses of 5 mil (0.125 mm) to 6 mil (0.15 mm), particularly when used in conjunction with ALPHA Stencils. Blade pressures should be between 1 – 2 lbs/in (0.16 – 0.34 kg/cm), depending on the print speed. The higher the print speed employed, the higher the blade pressure that is required.

# ALPHA® WS-809

## WATER SOLUBLE SOLDER PASTE

### SAFETY

While the ALPHA WS-809 flux system is not considered toxic, its use in typical reflow will generate a small amount of reaction and decomposition vapors. These vapors should be adequately exhausted from the work area. Consult the SDS for all safety information. The most recent version of the SDS is available from AlphaAssembly.com.

### SHIPPING & STORAGE

ALPHA WS-809 should be stored refrigerated upon receipt at (0 – 10)°C / (32°-50)°F. This will be sufficient to maintain a nominal shelf life. ALPHA WS-809 should be permitted to reach room temperature before unsealing its package prior to use. Room temperature storage for sealed containers should not exceed 14 days. The shelf-life of refrigerated ALPHA WS-809 is 6 months.

### TECHNICAL DATA

ALPHA WS-809 TECHNICAL DATA		
CATEGORY	RESULTS	PROCEDURES/REMARKS
<b>CHEMICAL PROPERTIES</b>		
Activity Level	ORH0 = J-STD Classification	IPC J-STD-004A
10 Day Copper Corrosion	<b>Pass</b> , (post-cleaning)	IPC J-STD-004A
<b>ELECTRICAL PROPERTIES</b>		
SIR (IPC) 1X Reflow	4.2 x 10 <sup>9</sup> ohms	Pass, 7 days (>10 <sup>8</sup> = Pass)
SIR (IPC) 2X Reflow with 48 hr delayed clean	1.1 x 10 <sup>9</sup> ohms	Pass (>10 <sup>8</sup> = Pass)
Electromigration (Bellcore)	Initial: 2.5 X 10 <sup>9</sup> ohms; Final: 5.0 X 10 <sup>10</sup> ohms	Pass (Final > Initial/10)
<b>PHYSICAL PROPERTIES</b>		
Paste Density	4.4 g/cc typical	63Sn/37Pb alloy
Tack Force vs. Time and Humidity	<b>Pass</b> , Change of <1 g/mm <sup>2</sup> over 24 hours at 25% and 75% RH	IPC J-STD-005
Viscosity	1,550 – 2,550 poise	Malcom Spiral Viscometer; ICP-029 10 rpm
Solderball	Preferred	IPC J-STD-005
Stencil Life	8 hours	@ 30-50% RH, 75-80°F (24-27°C)
Slump	<b>Pass</b>	IPC J-STD-005 Pass, cold slump after 10 min RH and hot slump after 10 min at 150°C at 25%, 50%, and 75% RH

# ALPHA® WS-809

## WATER SOLUBLE SOLDER PASTE


### PROCESSING GUIDELINES

ALPHA WS-809 PROCESSING GUIDELINES			
STORAGE-HANDLING	PRINTING	REFLOW (See page 4)	CLEANING
<p>•Refrigerate to guarantee stability @ 0-10°C (32-50°F)</p> <p>•Paste can be stored for 2 weeks at room temperature up to 77°F (25°C) prior to use.</p> <p>•When refrigerated, warm-up paste to room temperature for up to 4 hours. Paste must be ≥66°F (19°C) before processing. Verify paste temperature with a thermometer to ensure paste is at 66°F (19°C) or greater before setup.</p> <p>•Working range: (19 to 29)°C on the stencil.</p> <p>•Do not remove worked paste from stencil and mix with unused paste in jar. This will alter the rheology of the unused paste.</p> <p>•These are starting recommendations and all process settings should be reviewed independently.</p> <p>•6 month refrigerated shelf-life</p>	<p>STENCIL: Recommend ALPHA CUT or ALPHA FORM stencils at 0.125mm – 0.150mm (5-6 mil) thick for 0.4 – 0.5mm (0.016” or 0.020”) pitch. Stencil design is subject to many process variables. Contact your local Cookson Electronics site for advice.</p> <p>APERTURE DESIGN: ALPHA WS-809 may be printed using various aperture designs. A 10% reduction is recommended to optimize wipe frequency when using a stencil &gt; 5mils.</p> <p>SQUEEGEE: Metal (recommended)</p> <p>PASTE ROLL: 0.4 - 0.6 inches (1-1.5 cm) diameter and make additions when roll reaches 0.2 inch (0.5cm) diameter.</p> <p>PRESSURE: 1.0 – 2.0 pounds per inch of squeegee length (0.16 - 0.34 kg/cm).</p> <p>SPEED: 1- 6 inches (25-150 mm) per second.</p> <p>Release speed: within 3- 10 mm/s. Setting done under microscope. Poor release typically results in : icicles or missing paste in small apertures.</p>	<p>•Clean-dry air or nitrogen atmosphere.</p> <p><u>PROFILE (63/37 alloy):</u></p> <p>• Straight ramp of 0.5 – 1.3°C/sec to 200 – 235°C peak, TAL of 40 - 120 sec, time to peak &lt; 4 minutes is recommended.</p> <p>• Soak profile of 1.5 – 2.0°C/sec to 145-160° soak for a max of 90 seconds, peak temperature of 200 - 235°C , TAL of 40 - 120 sec, time to peak &lt; 4 minutes is recommended.</p> <p>Start with straight ramp design if new oven settings are required.</p> <p>Internal testing has shown straight ramp profile to be most effective for superior joint cosmetics (shininess).</p>	<ul style="list-style-type: none"> <li>• ALPHA WS-809 can generate foam while being cleaned in recirculating systems. Alpha 2007 is the recommended defoamer</li> <li>• The flux residues from Alpha WS-809 are water cleanable after two paste reflow cycles</li> <li>• Recommended rinse temperature 120-160°F (49-70°C)</li> <li>• No special nozzle configurations</li> <li>• Effective residue cleanability up to 48 hours after reflow. This allows maximum process flexibility and can eliminate an extra cleaning step in double- sided reflow processes</li> <li>• Ionic contamination levels passes <b>IPC J-STD 001D</b> requirement (&lt; 10µg/in<sup>2</sup>) Typical result is &lt;3 µg/in<sup>2</sup> attained with heated solution tested with an Ionograph.</li> </ul>


# ALPHA® WS-809

## WATER SOLUBLE SOLDER PASTE

Straight Ramp Profiles Tested

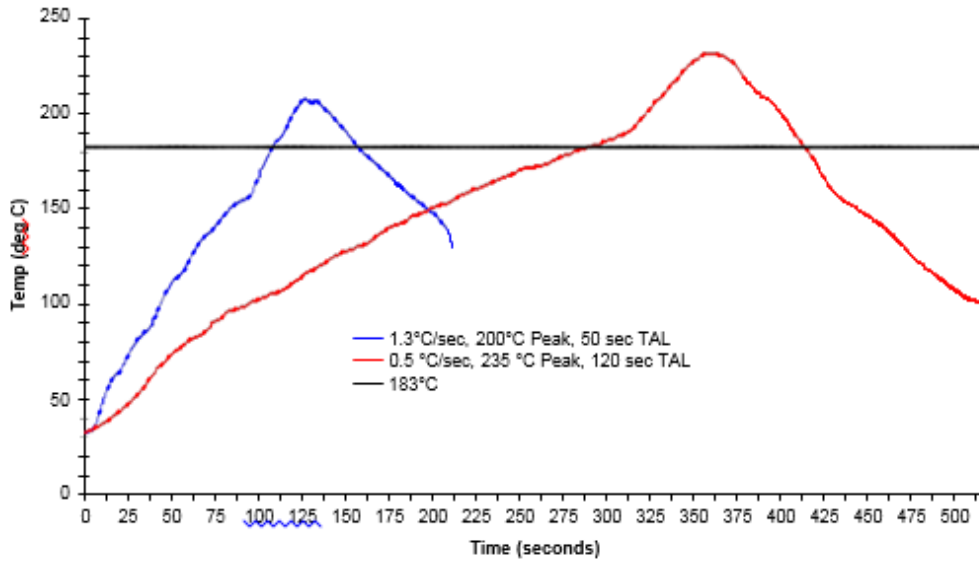

Reflow Profiles Tested

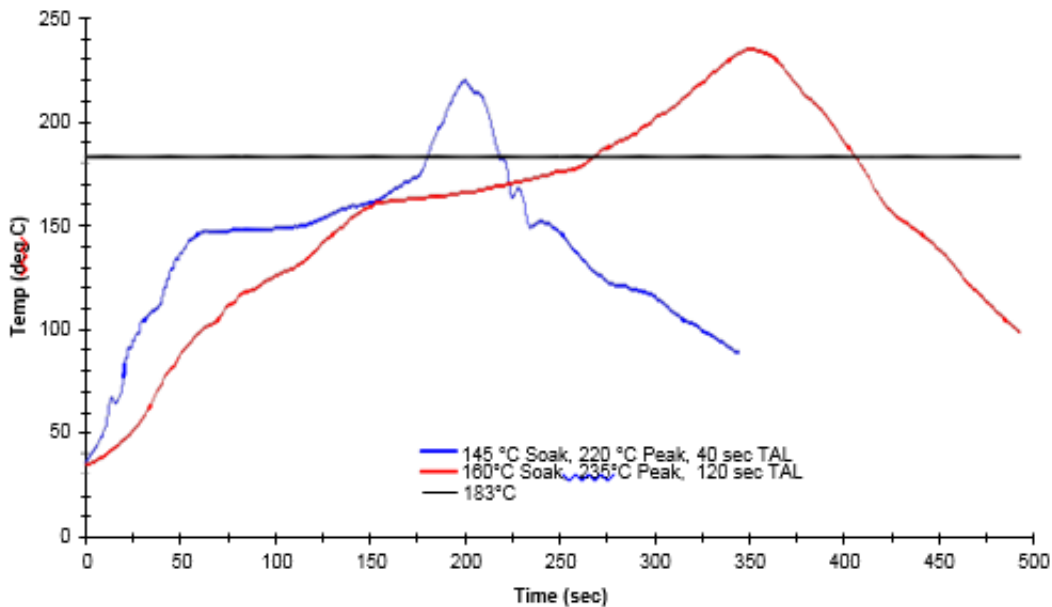

# ALPHA® WS-809

## WATER SOLUBLE SOLDER PASTE

### CONTACT INFORMATION

To confirm this is the most recent issue, please contact Alpha Assembly Solutions

AlphaAssembly.com

<p><b>North America</b> 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460</p>	<p><b>Europe</b> Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400</p>	<p><b>Asia</b> 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p>
-----------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency directory assistance Chemtrec 1 - 800 - 424 - 9300.

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OR MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any product defective at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect and consequential damages that may result from use of the products under conditions, and agrees to exonerate, indemnify and hold harmless MacDermid Incorporated therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in infringement of any patent rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© Registered Trademark of MacDermid Performance Solutions. ™ Trademark of MacDermid Performance Solutions.  
© Platform Specialty Products Corporation and its subsidiaries 2016.